

3 AA BATTERIES

INTRINSICALLY SAFE FLASHLIGHT

XPP-5420GXA

NIGHTSTICK
Life Depends on Light



IP-67
DUST/WATER
PROOF

ATEX
ZONE 0
IECEx


CLASS I
DIV 1



Large, textured button



Durable polymer body is
impact & chemical resistant



Sharp focused flashlight beam

CERTIFIED



210 LUMENS

1-800-233-2155 · 1-469-326-9400 · nightstick.com

INTRINSICALLY SAFE FLASHLIGHT

3 AA BATTERIES (not included)

ITEM NUMBER/UPC

- XPP-5420GXA, UPC 0 1739880810 1

MARKET APPLICATIONS

- Hazardous work environments, industrial, fire and rescue

CERTIFICATIONS

- cETLus, ATEX, IECEx, CE, InMetro, KOSHA, UKCA

CASE MATERIAL

- Engineered polymer

FLASHLIGHT LUMENS/RUNTIME

- 210L, 14 hrs. runtime

CANDELA

- 7,970

BEAM DISTANCE

- 187 m

WATER RATING

- ANSI IP-67 dustproof / waterproof

DROP RATING

- 2 meters

DIMENSIONS

- LENGTH: 7.0 in (178 mm)
- HANDLE DIAMETER: 1.1 in x 1.5 in (28 mm x 38 mm)
- HEAD DIAMETER: 1.8 in (46 mm)
- WEIGHT: 7.3 oz (207 g)

POWER SOURCE


- AA batteries (not included)

WARRANTY

- Limited lifetime

WHAT'S INCLUDED

- Flashlight
- Removable lanyard
- Instruction manual

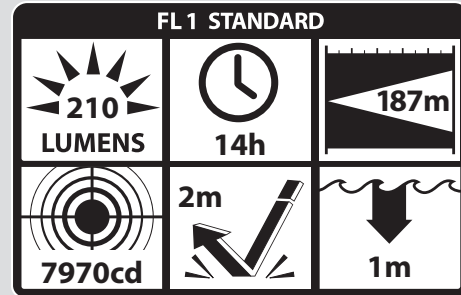

Bayco Products, Inc. XPP-5420GXA
 640 S. Sanden Blvd.
 Wylie, TX 75098



ID 4003544
 INTRINSICALLY SAFE
 SECURITE INTRINSEQUE



CLASS I DIV 1 GRPS A-D T3 Ex ia op is I Ma
 CLASS II & III DIV 1 GRPS E-G T135C Ex ia op is IIC T3 Ga
 CLASS I ZONE 0 AEx ia IIC T3 Ga Intertek ITS 13 ATEX 27837X
 I M 1 Ex ia op is I Ma ITS21UKEX0264X
 IECEx ITS 16.0067X
 IIC T3 Ga IECEx ITS 16.0067X
 -20°C ≤ Tamb ≤ +40°C
 1.5V/Cell AA Alkaline



Conforms to:
 ANSI/UL STD 913, ANSI/UL
 60079-0, ANSI/UL 60079-11
 ANSI/ISA 60079-26

Certified to:
 CAN/CSA STD C22.2 No 157
 CAN/CSA STD C22.2 No 60079-0
 CAN/CSA STD C22.2 No 60079-11
 CSA STD C22.2 No 25

SEE INSTRUCTION MANUAL
 VOIR MANUEL

MFG MM-YY



© 2024 Bayco Products Inc. Items shown are intended as a visual representation for informational purposes only and are subject to change without notice. Visit nightstick.

